

Department of Environmental Protection
SITE LOCATION OF DEVELOPMENT (SITE)
STANDARD CONDITIONS

STRICT CONFORMANCE WITH THE STANDARD AND SPECIAL CONDITIONS OF THIS APPROVAL IS NECESSARY FOR THE PROJECT TO MEET THE STATUTORY CRITERIA FOR APPROVAL.

1. This approval is dependent upon and limited to the proposals and plans contained in the application and supporting documents submitted and affirmed to by the applicant. Any variation from the plans, proposals and supporting documents is subject to the review and approval of the Board prior to implementation. Further subdivision of proposed lots by the applicant or future owners is specifically prohibited, without prior approval by the Board of Environmental Protection, and the applicant shall include deed restrictions to this effect.
2. The applicant shall secure and comply with all applicable Federal, State and local licenses, permits, authorizations, conditions, agreements, and orders, prior to or during construction and operation as appropriate.
3. The applicant shall submit all reports and information requested by the Board or Department demonstrating that the applicant has complied or will comply with all conditions of this approval. All preconstruction terms and conditions must be met before construction begins.
4. Advertising relating to matters included in this application shall refer to this approval only if it notes that the approval has been granted WITH CONDITIONS, and indicates where copies of those conditions may be obtained.
5. Unless otherwise provided in this approval, the applicant shall not sell, lease, assign or otherwise transfer the development or any portion thereof without prior written approval of the Board where the purpose or consequence of the transfer is to transfer any of the obligations of the developer as incorporated in this approval. Such approval shall be granted only if the applicant or transferee demonstrates to the Board that the transferee has the technical capacity and financial ability to comply with conditions of this approval and the proposals and plans contained in the application and supporting documents submitted by the applicant.
6. If the construction or operation of the activity is not begun within two years, this approval shall lapse and the applicant shall reapply to the Board for a new approval. The applicant may not begin construction or operation of the development until a new approval is granted. Reapplications for approval shall state the reasons why the development was not begun within two years from the granting of the initial approval and the reasons why the applicant will be able to begin the activity within two years from the granting of a new approval, if granted. Reapplications for approval may include information submitted in the initial application by reference.
7. If the approved development is not completed within five years from the date of the granting of approval, the Board may reexamine its approval and impose additional terms or conditions or prescribe other necessary corrective action to respond to significant changes in circumstances which may have occurred during the five-year period.
8. A copy of this approval must be included in or attached to all contract bid specifications for the development.
9. Work done by a contractor pursuant to this approval shall not begin before the contractor has been shown by the developer a copy of this approval.

DEPLW 0429



NATURAL RESOURCE PROTECTION ACT (NRPA) STANDARD CONDITIONS

THE FOLLOWING STANDARD CONDITIONS SHALL APPLY TO ALL PERMITS GRANTED UNDER THE NATURAL RESOURCE PROTECTION ACT, TITLE 38, M.R.S.A. SECTION 480-A ET.SEQ. UNLESS OTHERWISE SPECIFICALLY STATED IN THE PERMIT.

- A. **Approval of Variations From Plans.** The granting of this permit is dependent upon and limited to the proposals and plans contained in the application and supporting documents submitted and affirmed to by the applicant. Any variation from these plans, proposals, and supporting documents is subject to review and approval prior to implementation.
- B. **Compliance With All Applicable Laws.** The applicant shall secure and comply with all applicable federal, state, and local licenses, permits, authorizations, conditions, agreements, and orders prior to or during construction and operation, as appropriate.
- C. **Erosion Control.** The applicant shall take all necessary measures to ensure that his activities or those of his agents do not result in measurable erosion of soils on the site during the construction and operation of the project covered by this Approval.
- D. **Compliance With Conditions.** Should the project be found, at any time, not to be in compliance with any of the Conditions of this Approval, or should the applicant construct or operate this development in any way other than specified in the Application or Supporting Documents, as modified by the Conditions of this Approval, then the terms of this Approval shall be considered to have been violated.
- E. **Initiation of Activity Within Two Years.** If construction or operation of the activity is not begun within two years, this permit shall lapse and the applicant shall reapply to the Board for a new permit. The applicant may not begin construction or operation of the activity until a new permit is granted. Reapplications for permits shall state the reasons why the applicant will be able to begin the activity within two years from the granting of a new permit, if so granted. Reapplications for permits may include information submitted in the initial application by reference.
- F. **Reexamination After Five Years.** If the approved activity is not completed within five years from the date of the granting of a permit, the Board may reexamine its permit approval and impose additional terms or conditions to respond to significant changes in circumstances which may have occurred during the five-year period.
- G. **No Construction Equipment Below High Water.** No construction equipment used in the undertaking of an approved activity is allowed below the mean high water line unless otherwise specified by this permit.
- H. **Permit Included In Contract Bids.** A copy of this permit must be included in or attached to all contract bid specifications for the approved activity.
- I. **Permit Shown To Contractor.** Work done by a contractor pursuant to this permit shall not begin before the contractor has been shown by the applicant a copy of this permit.

Revised (4/92)

DEP LW0428




STATE OF MAINE
DEPARTMENT OF ENVIRONMENTAL PROTECTION
17 STATE HOUSE STATION, AUGUSTA, MAINE 04333

Erosion Control for Homeowners

Before Construction

1. If you have hired a contractor, make sure you discuss your permit-by-rule with them. Talk about what measures they plan to take to control erosion. Everybody involved should understand what the resource is, and where it is located. Most people can identify the edge of a lake or river. However, the edges of wetlands are often not so obvious. Your contractor may be the person actually pushing dirt around, but you are both responsible for complying with the permit-by-rule.
2. Call around to find where erosion control materials are available. Chances are your contractor has these materials already on hand. You probably will need silt fence, hay bales, wooden stakes, grass seed (or conservation mix), and perhaps filter fabric. Places to check for these items include farm & feed supply stores, garden & lawn suppliers, and landscaping companies. It is not always easy to find hay or straw during late winter and early spring. It also may be more expensive during those times of year. Plan ahead -- buy a supply early and keep it under a tarp.
3. Before any soil is disturbed, make sure an erosion control barrier has been installed. The barrier can be either a silt fence, a row of staked hay bales, or both. Use the drawings below as a guide for correct installation and placement. The barrier should be placed as close as possible to the soil-disturbance activity.
4. If a contractor is installing the erosion control barrier, double check it as a precaution. Erosion control barriers should be installed "on the contour", meaning at the same level or elevation across the land slope, whenever possible. This keeps stormwater from flowing to the lowest point along the barrier where it can build up and overflow or destroy the barrier.

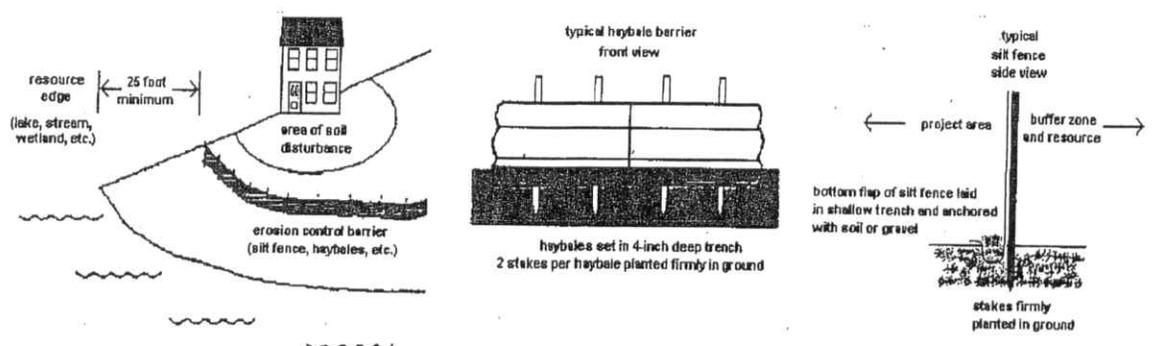

During Construction

1. Use lots of hay or straw mulch on disturbed soil. The idea behind mulch is to prevent rain from striking the soil directly. It is the force of raindrops hitting the bare ground that makes the soil begin to move downslope with the runoff water, and cause erosion. More than 90% of erosion is prevented by keeping the soil covered.
2. Inspect your erosion control barriers frequently. This is especially important after a rainfall. If there is muddy water leaving the project site, then your erosion controls are not working as intended. You or your contractor then need to figure out what can be done to prevent more soil from getting past the barrier.
3. Keep your erosion control barrier up and maintained until you get a good and healthy growth of grass and the area is permanently stabilized.

STORMWATER MANAGEMENT LAW STANDARD CONDITIONS

STRICT CONFORMANCE WITH THE STANDARD AND SPECIAL CONDITIONS OF THIS APPROVAL IS NECESSARY FOR THE PROJECT TO MEET THE STATUTORY CRITERIA FOR APPROVAL

Standard conditions of approval. Unless otherwise specifically stated in the approval, a department approval is subject to the following standard conditions pursuant to Chapter 500 Stormwater Management Law.

- (1) Approval of variations from plans. The granting of this approval is dependent upon and limited to the proposals and plans contained in the application and supporting documents submitted and affirmed to by the applicant. Any variation from these plans, proposals, and supporting documents must be reviewed and approved by the department prior to implementation. Any variation undertaken without approval of the department is in violation of 38 M.R.S.A. § 420-D(8) and is subject to penalties under 38 M.R.S.A. § 349.
- (2) Compliance with all terms and conditions of approval. The applicant shall submit all reports and information requested by the department demonstrating that the applicant has complied or will comply with all terms and conditions of this approval. All preconstruction terms and conditions must be met before construction begins.
- (3) Advertising. Advertising relating to matters included in this application may not refer to this approval unless it notes that the approval has been granted WITH CONDITIONS, and indicates where copies of those conditions may be obtained.
- (4) Transfer of project. Unless otherwise provided in this approval, the applicant may not sell, lease, assign, or otherwise transfer the project or any portion thereof without written approval by the department where the purpose or consequence of the transfer is to transfer any of the obligations of the developer as incorporated in this approval. Such approval may only be granted if the applicant or transferee demonstrates to the department that the transferee agrees to comply with conditions of this approval and the proposals and plans contained in the application and supporting documents submitted by the applicant. Approval of a transfer of the permit must be applied for no later than two weeks after any transfer of property subject to the license.
- (5) Initiation of project within two years. If the construction or operation of the activity is not begun within two years, this approval shall lapse and the applicant shall reapply to the department for a new approval. The applicant may not begin construction or operation of the project until a new approval is granted. A reapplication for approval may include information submitted in the initial application by reference.
- (6) Reexamination after five years. If the project is not completed within five years from the date of the granting of approval, the department may reexamine its approval and impose additional terms or conditions or prescribe other necessary corrective action to respond to significant changes in circumstances or requirements which may have occurred during the five-year period.

- (7) Certification. Contracts must specify that "all work is to comply with the conditions of the Stormwater Permit." Work done by a contractor or subcontractor pursuant to this approval may not begin before the contractor and any subcontractors have been shown a copy of this approval with the conditions by the developer, and the owner and each contractor and subcontractor has certified, on a form provided by the department, that the approval and conditions have been received and read, and that the work will be carried out in accordance with the approval and conditions. Completed certification forms must be forwarded to the department.
- (8) Maintenance. The components of the stormwater management system must be adequately maintained to ensure that the system operates as designed, and as approved by the department.
- (9) Recertification requirement. Within three months of the expiration of each five-year interval from the date of issuance of the permit, the permittee shall certify the following to the department.
 - (a) All areas of the project site have been inspected for areas of erosion, and appropriate steps have been taken to permanently stabilize these areas.
 - (b) All aspects of the stormwater control system have been inspected for damage, wear, and malfunction, and appropriate steps have been taken to repair or replace the facilities.
 - (c) The erosion and stormwater maintenance plan for the site is being implemented as written, or modifications to the plan have been submitted to and approved by the department, and the maintenance log is being maintained

November 16, 2005

464

L-24441-24-A-N/L-24441-TF-B-N

56 of 60

Special Condition
for
Third Party Inspection Program

DEPLW078-B2001

November 2008

THIRD-PARTY INSPECTION PROGRAM

1.0 THE PURPOSE OF THE THIRD-PARTY INSPECTION

As a condition of this permit, the Maine Department of Environmental Protection (MDEP) requires the permit applicant to retain the services of a third-party inspector to monitor compliance with MDEP permit conditions during construction. The objectives of this condition are as follows:

- 1) to ensure that all construction and stabilization activities comply with the permit conditions and the MDEP-approved drawings and specifications,
- 2) to ensure that field decisions regarding erosion control implementation, stormwater system installation, and natural resource protection are based on sound engineering and environmental considerations, and
- 3) to ensure communication between the contractor and MDEP regarding any changes to the development's erosion control plan, stormwater management plan, or final stabilization plan.

This document establishes the inspection program and outlines the responsibilities of the permit applicant, the MDEP, and the inspector.

2.0 SELECTING THE INSPECTOR

At least 30 days prior to starting any construction activity on the site, the applicant will submit the names of at least two inspector candidates to the MDEP. Each candidate must meet the minimum qualifications listed under section 3.0. The candidates may not be employees, partners, or contracted consultants involved with the permitting of the project or otherwise employed by the same company or agency except that the MDEP may accept subcontractors who worked for the project's primary consultant on some aspect of the project such as, but not limited to, completing wetland delineations, identifying significant wildlife habitats, or conducting geotechnical investigations, but who were not directly employed by the applicant, as Third Party inspectors on a case by case basis. The MDEP will have 15 days from receiving the names to select one of the candidates as the inspector or to reject both candidates. If the MDEP rejects both candidates, then the MDEP shall state the particular reasons for the rejections. In this case, the applicant may either dispute the rejection to the Director of the Bureau of Land and Water Quality or start the selection process over by nominating two, new candidates.

3.0 THE INSPECTOR'S QUALIFICATIONS

Each inspector candidate nominated by the applicant shall have the following minimum qualifications:

- 1) a degree in an environmental science or civil engineering, or other demonstrated expertise,
- 2) a practical knowledge of erosion control practices and stormwater hydrology,
- 3) experience in management or supervision on large construction projects,
- 4) the ability to understand and articulate permit conditions to contractors concerning erosion control or stormwater management,
- 5) the ability to clearly document activities being inspected,
- 6) appropriate facilities and, if necessary, support staff to carry out the duties and responsibilities set forth in section 6.0 in a timely manner, and
- 7) no ownership or financial interest in the development other than that created by being retained as the third-

party inspector.

4.0 INITIATING THE INSPECTOR'S SERVICES

The applicant will not formally and finally engage for service any inspector under this permit condition prior to MDEP approval or waiver by omission under section 2.0. No clearing, grubbing, grading, filling, stockpiling, or other construction activity will take place on the development site until the applicant retains the MDEP-approved inspector for service.

5.0 TERMINATING THE INSPECTOR'S SERVICES

The applicant will not terminate the services of the MDEP-approved inspector at any time between commencing construction and completing final site stabilization without first getting written approval to do so from the MDEP.

6.0 THE INSPECTOR'S DUTIES AND RESPONSIBILITIES

The inspector's work shall consist of the duties and responsibilities outlined below.

- 1) Prior to construction, the inspector will become thoroughly familiar with the terms and conditions of the state-issued site permit, natural resources protection permit, or both.
- 2) Prior to construction, the inspector will become thoroughly familiar with the proposed construction schedule, including the timing for installing and removing erosion controls, the timing for constructing and stabilizing any basins or ponds, and the deadlines for completing stabilization of disturbed soils.
- 3) Prior to construction, the inspector will become thoroughly familiar with the project plans and specifications, including those for building detention basins, those for installing the erosion control measures to be used on the site, and those for temporarily or permanently stabilizing disturbed soils in a timely manner.
- 4) During construction, the inspector will monitor the contractor's installation and maintenance of the erosion control measures called for in the state permit(s) and any additional measures the inspector believes are necessary to prevent sediment discharge to off-site properties or natural resources. This direction will be based on the approved erosion control plan, field conditions at the time of construction, and the natural resources potentially impacted by construction activities.
- 5) During construction, the inspector will monitor the contractor's construction of the stormwater system, including the construction and stabilization of ditches, culverts, detention basins, water quality treatment measures, and storm sewers.
- 6) During construction, the inspector will monitor the contractor's installation of any stream or wetland crossings.
- 7) During construction, the inspector will monitor the contractor's final stabilization of the project site.
- 8) During construction, the inspector will keep logs recording any rain storms at the site, the contractor's activities on the site, discussions with the contractor(s), and possible violations of the permit conditions.
- 9) During construction, the inspector will inspect the project site at least once a week and before and after any significant rain event. The inspector will photograph all protected natural resources both before and after construction and will photograph all areas under construction. All photographs will be identified with, at a minimum the date the photo was taken, the location and the name of the individual taking the photograph.
Note: the frequency of these inspections as contained in this condition may be varied to best address particular project needs.
- 10) During construction, the inspector will prepare and submit weekly (or other frequency) inspection reports to

the MDEP.

- 11) During construction, the inspector will notify the designated person at the MDEP immediately of any sediment-laden discharges to a protected natural resource or other significant issues such as the improper construction of a stormwater control structure or the use of construction plans not approved by the MDEP.

7.0 INSPECTION REPORTS

The inspector will submit weekly written reports (or at another designated frequency), including photographs of areas that are under construction, on a form provided by the Department to the designated person at the MDEP. Each report will be due at the MDEP by the Friday (or other designated day) following the inspection week (Monday through Sunday).

The weekly report will summarize construction activities and events on the site for the previous week as outlined below.

- 1) The report will state the name of the development, its permit number(s), and the start and end dates for the inspection week (Monday through Sunday).
- 2) The report will state the date(s) and time(s) when the inspector was on the site making inspections.
- 3) The report will state the date(s) and approximate duration(s) of any rainfall events on the site for the week.
- 4) The report will identify and describe any erosion problems that resulted in sediment leaving the property or sediment being discharged into a wetland, brook, stream, river, lake, or public storm sewer system. The report will describe the contractor's actions to repair any damage to other properties or natural resources, actions to eliminate the erosion source, and actions to prevent future sediment discharges from the area.
- 5) The report will list the buildings, roads, parking lots, detention basins, stream crossings or other features open to construction for the week, including those features or areas actively worked and those left unworked (dormant).
- 6) For each area open to construction, the report will list the date of initial soil disturbance for the area.
- 7) For each area open to construction, the report will note which areas were actively worked that week and which were left dormant for the week. For those areas actively worked, the report will briefly state the work performed in the area that week and the progress toward final stabilization of the area -- e.g. "grubbing in progress", "grubbing complete", "rough grading in progress", "rough grading complete", "finish grading in progress", "finish grading complete", "permanent seeding completed", "area fully stable and temporary erosion controls removed", etc.
- 8) For each area open to construction, the report will list the erosion and sedimentation control measures installed, maintained, or removed during the week.
- 9) For each erosion control measure in-place, the report will note the condition of the measure and any maintenance performed to bring it to standard.

468

Third Party Inspection Form

This report is prepared by a Third Party Inspector to meet the requirements of the Third Party Inspector Condition attached as a Special Condition to the Department Order that was issued for the project identified below. The information in this report/form is not intended to serve as a determination of whether the project is in compliance with the Department permit or other applicable Department laws and rules. Only Department staff may make that determination.

TO: PM, Maine DEP (@maine.gov)	FROM:
PROJECT NAME/ LOCATION:	DEP #:
DATE OF INSPECTION:	DATE OF REPORT:
WEATHER:	CONDITIONS:

SITE CHARACTERISTICS:

# ACRES OPEN:	# ACRES ACTIVE:	# ACRES INACTIVE:
LOCATION OF OPEN LAND:	LOCATION OF ACTIVE LAND:	LOCATION OF INACTIVE LAND:
OPEN SINCE:	OPEN SINCE:	OPEN SINCE:

PROGRESS OF WORK:

INSPECTION OF:	Satisfactory	Minor Deviation (corrective action required)	Unsatisfactory (include photos)
STORMWATER CONTROL (VEGETATIVE & STRUCTURAL BMP'S)			
EROSION & SEDIMENTATION CONTROL (TEMPORARY & PERMANENT BMP'S)			
OTHER: (PERMIT CONDITIONS, ENGINEERING DESIGN, ETC.)			

COMMENTS/CORRECTIVE ACTIONS TAKEN (attach additional sheets as necessary):

Photos (must be labeled with date, photographer and location):

Cc:		
<i>Original and all copies were sent by email only.</i>		