

MAINE CLEAN TRANSPORTATION ROADMAP FOR MEDIUM- AND HEAVY-DUTY VEHICLES

Case Study: Fleet 4

prepared for



GOVERNOR'S OFFICE OF
Policy Innovation
and the Future



MaineDOT



MAINE GOVERNOR'S
Energy Office

prepared by



November 2024

TABLE OF CONTENTS

Summary	1
Introduction	1
Fleet Information.....	1
Vehicle Recommendations	2
Charging and Infrastructure	4
Fleet Electrification Overview	4
Charging Equipment.....	5
Managed Charging	6
On-Route versus Depot Charging	7
Fueling/Charging Cost Analysis	9
Daily Charging Load Profiles	9
EVSE Financing	11
Federal Incentives	11
State Incentives	12
Results	12
Total Cost of Ownership.....	12
Fleet Emissions	21
Implementation Considerations	22
Energy Storage and Resiliency	22
Preheat/Precool	23
“Vampire” Energy.....	23
References	24

LIST OF TABLES

Table 1	Fleet 4 Vehicle Inventory.....	2
Table 2	Tractor-Trailer Electric Vehicle Replacements.....	3
Table 3	Efficiency Maine Incentive Levels.....	12
Table 4	Volvo Day Cab Itemized Cumulative Costs over 12 Year Vehicle Life	15
Table 5	Mack Sleeper Itemized Cumulative Costs over 12 Year Vehicle Life.....	17
Table 6	Peterbilt Day Cab Itemized Cumulative Costs over 12 Year Vehicle Life.....	19
Table 7	Yard Tractor Itemized Cumulative Costs over 12 Year Vehicle Life.....	21
Table 8	Internal Combustion Engine Fleet Emissions	22

LIST OF FIGURES

Figure 1	Types of Chargers	6
Figure 2	Alternative Fuels Database Detailed Charger Information.....	8
Figure 3	Daily Charging Load Profiles—All Vehicles	9
Figure 4	Warehouse 2 Annual Energy Cost Under Diesel and EV Scenarios.....	10
Figure 5	Warehouse 2 Energy Cost Per Distanced Traveled	10
Figure 6	Day Cab—Fleet Costs over Time	14
Figure 7	Day Cab—Itemized Fleet Costs	14
Figure 8	Mack Sleeper—Fleet Costs Over Time	16
Figure 9	Mack Sleeper—Itemized Fleet Costs	16
Figure 10	Peterbilt Day Cab—Fleet Costs Over Time	18
Figure 11	Peterbilt Day Cab—Itemized Fleet Costs.....	18
Figure 12	Yard Tractor—Fleet Costs Over Time	20
Figure 13	Yard Tractor—Itemized Fleet Costs.....	20

SUMMARY

Fleet 4 is a retail goods delivery business that has central warehousing and makes retail deliveries statewide. The vehicles domicile at a southern Maine warehouse, including 97 Class 8 heavy-duty cabs, tractors, and sleepers.

The Class 8 cabs and sleepers performing retail delivery travel approximately 244 miles per day and do not have a precise domicile schedule, though it was estimated to be from 5 p.m. to 6 a.m. The warehouse also uses five yard tractors to switch trailers, operating approximately 55 miles per day. These travel patterns and overnight dwell times are well-suited to electric vehicles. These vehicles could be charged fully within a dwell time of three hours using Level 3 DC fast chargers, and transitioning to these zero-emission alternatives would result in immediate fuel and maintenance cost savings. Despite that, a zero-emission replacement is not projected to produce lifetime savings due to high upfront capital costs for electric trucks.

INTRODUCTION

The Maine Clean Transportation Roadmap for Medium- and Heavy-Duty Vehicles (“roadmap”) charts a path for Maine to decarbonize the trucks and buses moving people and goods within and through the State. As part of the roadmap, the project team has conducted a series of case studies with Maine businesses to identify real world opportunities and challenges for fleet electrification. The case studies are intended to 1) serve the participating fleets by providing customized fleet electrification assessments; and 2) augment the roadmap by evaluating electrification use cases, total cost of ownership, and barriers in the context of actual Maine business operations.

Fleet Information

Fleet 4 operates 92 cabs out of their warehouse in southern Maine. These trucks are used for delivery from the warehouse to retail locations. The five yard tractors which are part of the fleet are used to switch trailers out. Table 1 provides an inventory of Fleet 4’s vehicles.

TABLE 1 FLEET 4 VEHICLE INVENTORY

Vehicle Group	Vehicle Quantity	Vehicle Class	Fuel Type	Manufacturing Year (average)	Average Annual Miles	Owned or Leased Vehicles
Volvo Day Cab (owned)	48	Class 8–Over 33,000 lbs.	Diesel	2020	99,469	Owned
Volvo Day Cab (leased)	30	Class 8–Over 33,000 lbs.	Diesel	2022	90,426	Leased
Mack 64T Sleeper	9	Class 8–Over 33,000 lbs.	Diesel	2019	99,011	Owned
Peterbilt Day Cab	5	Class 8–Over 33,000 lbs.	Diesel	2023	67,315	Leased
Yard Tractor	5	Class 8–Over 33,000 lbs.	Diesel	2019	20,000	Owned

Vehicle Recommendations

To adequately define the needs of a fleet, the vehicles used are categorized into duty cycles. Duty cycles are classifications that describe both the *vehicle*, by type and class, and *how it is operated*, including typical miles traveled, type of use (local versus highway), and fuel consumption.

Vehicle recommendations are not exhaustive of all options that may be on the market; selections are included based on those most likely to meet Fleet 4's duty cycles.

Class 8 Day Cabs and Trailers

Fleet 4 operates 83 day cabs out of their southern Maine warehouse that drive an average of 258 miles per day and dwell for approximately 12 hours overnight. For longer deliveries, they operate five sleeper cabs which drive an average of 271 miles per day and are estimated to domicile for 12 hours overnight.

The recommended electric tractor trailers in Table 2 represent the high-end of ranges available on the market. These vehicles can meet the majority of the warehouse vehicles' duty cycle with overnight Level 2 charging. If needed, they can be charged using DC fast charging during irregular dwell times. For routes over the maximum range, fleet 4 can take advantage of public DC fast chargers along their routes to quickly recharge. This is explained further in the Charging and Infrastructure section.




TABLE 2 TRACTOR-TRAILER ELECTRIC VEHICLE REPLACEMENTS

Make	BYD	Freightliner	Tesla	XOS	Nikola	Volvo
Model	8TT	eCascadia	Semi	HDXT	TRE BEV	VNR Electric
Availability	Now	Now	Coming Soon	Now	Now	Now
Class/Size	Class 8	Class 8	Class 8	Class 8	Class 8	Class 8
Range	200 miles	230 miles	500 miles	230 miles	350 miles	275 miles
Payload	78,765 lbs.	60,000 lbs.	44,000 lbs.	56,000 lbs.	40,000 lbs.	66,000 lbs.
Energy Capacity	422 kWh	438 kWh	1000 kWh	N/A	753 kWh	565 kWh
Level 3 Charging Time (350 kW power)	1.5 hours	1.5 hours	1 hour (Using Tesla Semi Charger)	N/A	2.5 hours	2 hours
Website	8TT	eCascadia	Semi	HDXT	TRE BEV	VNR Electric
Vehicle Photo						

Class 8 Yard Tractors

Fleet 4 operates five yard tractors at their southern Maine warehouse that drive an average of 55 miles per day and dwell for approximately 12 hours overnight. Unlike the tractor-trailers, these vehicles are used on-site to switch trailers between cabs.

TABLE 3 ELECTRIC YARD TRACTOR ALTERNATIVES

Make	BYD	Orange EV	Orange EV
Model	8Y	e-TRIEVER	HUSK-e
Availability	Now	Now	Now
Class/Size	Class 8	Class 8	Class 8
Payload	10 hours	N/A	N/A
Range	82,200 lbs.	GCWR is 81,000 lbs.	N/A—GCWR is 180,000 lbs.
Fuel Tank Capacity	217 kWh	180 kWh	243 kWh
Charging Time	1.5 hours	1.5 hours	2 hours
Website	8Y	e-TRIEVER	HUSK-e
Vehicle Photo			

CHARGING AND INFRASTRUCTURE

Fleet Electrification Overview

Fleet electrification involves coordination between the fleet and their electric utility, contractors, developers, vehicle original equipment manufacturers, and electric vehicle service providers to determine the power, quantity, and arrangement of electric vehicle supply equipment (EVSE), or vehicle charging, for a particular site. Once vehicle quantity and duty cycles are defined, the quantity and power of EVSE needed can be determined. In most fleet charging configurations, it is typical to install one dedicated charging plug per electric vehicle (EV). This is to support overnight charging, when electricity rates are low and vehicles are ordinarily not in operation; overnight charging typically lends itself to less costly EVSE due to the lower power usage required to charge a vehicle over a long dwell time. For use cases with higher energy needs and/or less available dwell time for charging, higher-power chargers may be required to meet the energy needs of EVs.

Regardless of the quantity or power of charging equipment, it is important to keep in mind the additional space necessary for charging dispensers, transformers, and other considerations which may change a site's traffic pattern or "flow."

It is recommended that any chargers installed are networked, which means they include the capability to communicate over cellular networks. Most businesses choose to install networked chargers, due to access control, ensuring that only the fleet's service vehicles can charge at these chargers. Alternatively, fleets can install "behind the fence" non-networked charging in a secure location only accessible to fleet vehicles, assuring the same charging restrictions and availability. However, networked chargers can provide a bevy of technical information, including duration of charge and charge rate, useful for operational planning and decision-making.

Inductive (wireless) charging equipment, which uses an electromagnetic field to transfer electricity to an EV without a cord, is now commercially available as an aftermarket add-on, and has the potential to support rapid medium- and heavy-duty vehicle (MHDV) charging at depots and in warehouse environments where trucks park for extended periods of time, such as loading bays.

Spreading a charging schedule across as many hours as possible will often lead to the lowest capital and operational cost; thus, it is important to weigh various charging solutions against business needs. The next section describes in greater detail some solutions for how this can be addressed.

Charging Equipment

EV charging equipment is classified by battery charging rates. Time to charge will vary depending on battery state of charge, total energy storage, the type of battery, and the type of charging equipment. Charging time can range from less than 20 minutes to 20 hours or more, depending on these factors.

There are three types of charging: Level 1, Level 2, and Level 3 (direct current or DC fast). Level 1 charging is the slowest method and uses a standard alternating current (AC) wall outlet. It adds 2 to 5 miles of range per hour of charging. Because of its slow rate, Level 1 charging is typically only used at home for personal vehicles or workplaces. Level 2 is another AC method that is significantly faster than Level 1. Level 2 is the most common method of charging as it allows most light- and medium-duty vehicles to charge overnight while also being significantly cheaper and easier to install than Level 3 chargers. Level 2 chargers are most commonly found serving commercial vehicles and in public places like parking garages, shopping centers, and tourist attractions. Level 3 DC fast charging is the fastest method of charging, but also the most expensive for both the charger and infrastructure required. These chargers are typically only recommended for heavy-duty trucks and vehicles that dwell for a few hours or less.

Across the United States, there are four major plug types: J1772 ("J-plug"), Tesla (also known as North American Charging Standard or NACS, or SAE J3400), CHAdeMO, and CCS.

- » The J1772 standard is used for Level 1 and 2 AC charging.
- » Tesla is used for Level 2 and 3.
- » CHAdeMO and CCS are used primarily for Level 3 DC fast charging.








While other proprietary plugs exist for MHDVs, these four represent the majority of those in use. The U.S. Department of Transportation National Electric Vehicle Infrastructure (NEVI) Program has standardized federally funded plugs across Level 2 and Level 3 charging, helping build

out a national network of publicly-available charging equipment with predictable plug configurations.

In 2022, Tesla opened its previously proprietary charging standard to other EV manufacturers. In the coming years, its NACS will become the most prevalent charger connection. This connector is also referenced as SAE J3400. All connector types are shown below in Figure 1, but fleets should anticipate a growing share of vehicle options to utilize the NACS standard.

Industry leaders have introduced the concept of the Megawatt Charging Solution, designed to provide higher levels of power needed by MHDVs over a shorter period of charging time. Megawatt chargers require significant infrastructure investment (1–3 million volt-amperes or MVA) and may allow for faster adoption of EVs for long-haul trucking. However, most local and regional delivery businesses can be supported by Level 2 or DC fast chargers.

FIGURE 1 TYPES OF CHARGERS

Type	Level 1 Charging	Level 2 Charging	Level 3 DC Fast Charging	Megawatt
Connector	 J1772	  J1772 Tesla/ NACS/ SAE J3400	   CHAdeMo CCS Tesla/ NACS/ SAE J3400	 MCS
Voltage	120 V AC	208–240 V AC	400 V–1000 V DC	1–3 kV A
Power Output	1 kW	7 kW–19 kW	50–350 kW	900 kW+

Managed Charging

Energy management can greatly decrease operational costs associated with fleet electrification. Managed charging, sometimes called “smart charging,” entails the purchase and use of EVSE that can actively track and modulate charging, and a subscription for energy management software provided by the EVSE manufacturer or network provider to keep consumption levels within a predetermined range. While there are additional up-front and monthly costs associated with these technologies, their long-term benefits should also be considered from a total cost of ownership perspective.

Depending on the design of local electricity rates, electricity pricing can be based upon the time of day during which electricity is used, where marginal pricing is greater during times of high demand and lower when strain to the grid is at its lowest. Fleets may also be exposed to demand charges, which are increased electricity charges incurred from large, simultaneous power draws—such as when multiple heavy-duty trucks plug into fast charging at the same location at the same time. However, charging when electricity costs are lowest is not always feasible or operationally convenient for fleets. Managed charging software automates charging to coincide with dwell times while enabling fleets to benefit from lower electric rates and/or mitigating demand charges.

Fleet 4 could utilize managed charging when their vehicles have extended downtime. This could allow them to charge the vehicles using less equipment rather than procuring one charging port per vehicle.

On-Route versus Depot Charging

Most commercial EV deployments currently in operation rely solely on depot charging, or a “return-to-base” schedule where a fleet keeps vehicles parked at one location owned/leased by the organization operating those vehicles. While policy efforts and Federal funding are advancing the development of strategically sited on-route fast charging and public charging hubs, it is recommended that current EV deployments plan for on-site depot charging, where feasible.

The Alternative Fuels Database, provided by the U.S. DOE, includes a [tool](#) to find publicly available charging stations, as does the similar [PlugShare](#) tool. Users can also map a route, similar to Google Maps, and see all charging stations along the route. These tools compile data from many networks of charging stations, such as [ChargePoint](#), [Electrify America](#), [EVgo](#), and [Tesla](#). By clicking on a charging station, one can view the number of available charging ports, as well as the type of charging connector.

It is important to note that not all charging stations listed on these sites will be appropriate for charging MHDVs. Most Class 2b and Class 3 vehicles will be able to use charging stations designed for light-duty vehicles, but Class 4–8 vehicles are often too large for typical light-duty vehicle parking spaces, and may require higher power levels to recharge quickly. It is anticipated that most public charging stations for medium- and heavy-duty trucks will require power levels of 150–350kW or more per port, paired with pull-through charging stalls and

ample clearance. These may not be available at stations that appear in the DOE or PlugShare tools.

Few DC fast chargers are currently available on-route, and those that do exist may not be able to accommodate a Class 8 truck. The network of available chargers will continue to grow, however; active chargers and hours of operation are updated in these tools on a monthly basis. An example charger that would be convenient for Fleet 4 is shown in Figure 2.

FIGURE 2 ALTERNATIVE FUELS DATABASE DETAILED CHARGER INFORMATION

DARLINGS CDRH SALES CHARGER 2

439 Western Ave
Augusta, ME 04330

888-758-4389

Electric Vehicle Charging

Connectors: CHAdeMO CCS

EV Charging Ports: 1

Public

24 hours daily

Charging Port Details				
Charger Type	Ports	Connectors	Power Output	Network
DC Fast	1	CHAdeMO: 1 CCS: 1	CHAdeMO: 62.5 kW CCS: 62 kW	ChargePoint

Last confirmed: October 2024

Public chargers such as ChargePoint or EVgo typically require that drivers use a mobile application to interact with the charger and pay for their charge, either through the app itself, or with a credit card at the charger. In 2023, the NEVI program introduced standards for future EVSE installation including provisions that stations must implement non-proprietary charging ports, accept open-access payments such as pay by phone or contactless credit/debit card, be located along designated FHWA [Alternative Fuel Corridors](#), and be publicly available.

Fueling/Charging Cost Analysis

A charging analysis was performed for electrification scenarios for Fleet 4 using CALSTART's Charging Infrastructure Optimization (CHARIOT) Tool. The CHARIOT tool aims to optimize Fleet 4's charging schedule, to find a schedule that works well with fleet operations while achieving lowest possible energy cost. It also provides a projected energy flow of a fleet's energy consumption and, when applicable, potential for on-site energy generation (e.g., solar power with battery storage) to get a sense of a site's energy independence and grid reliance. Fleet 4's electricity is provided by Central Maine Power (CMP).

The CHARIOT tool was used twice for each warehouse: once using Versant's high peak time-of-use (TOU) rate (\$3.55/kWh) and once using a flat TOU rate (\$0.12/kWh).

Daily Charging Load Profiles

Figure 3 shows what daily charging profiles (energy demand by hour) might look like for this fleet. Total annual energy cost and cost per mile for diesel versus electric vehicles are shown in Figure 4 and Figure 5, respectively for a flat time-of-use rate scenario. Based on the anticipated energy needs of 93 electric trucks at the warehouse compared to 93 diesel trucks, Fleet 4 would be estimated to achieve significant reductions to their annual energy costs. Because of the reduced cost of charging compared to diesel fuel, Fleet 4 could expect a significantly decreased cost per mile of operation.

FIGURE 3 DAILY CHARGING LOAD PROFILES—ALL VEHICLES

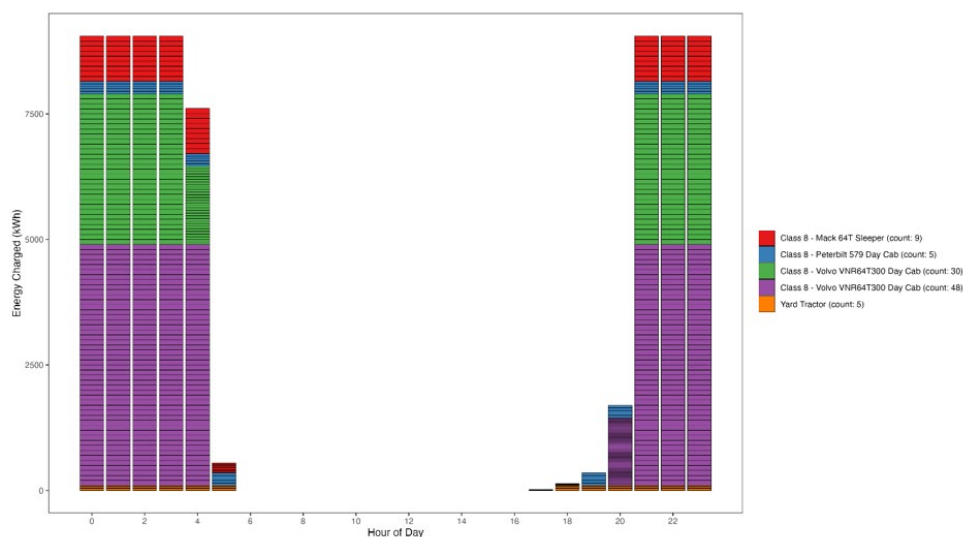


FIGURE 4 WAREHOUSE 2 ANNUAL ENERGY COST UNDER DIESEL AND EV SCENARIOS


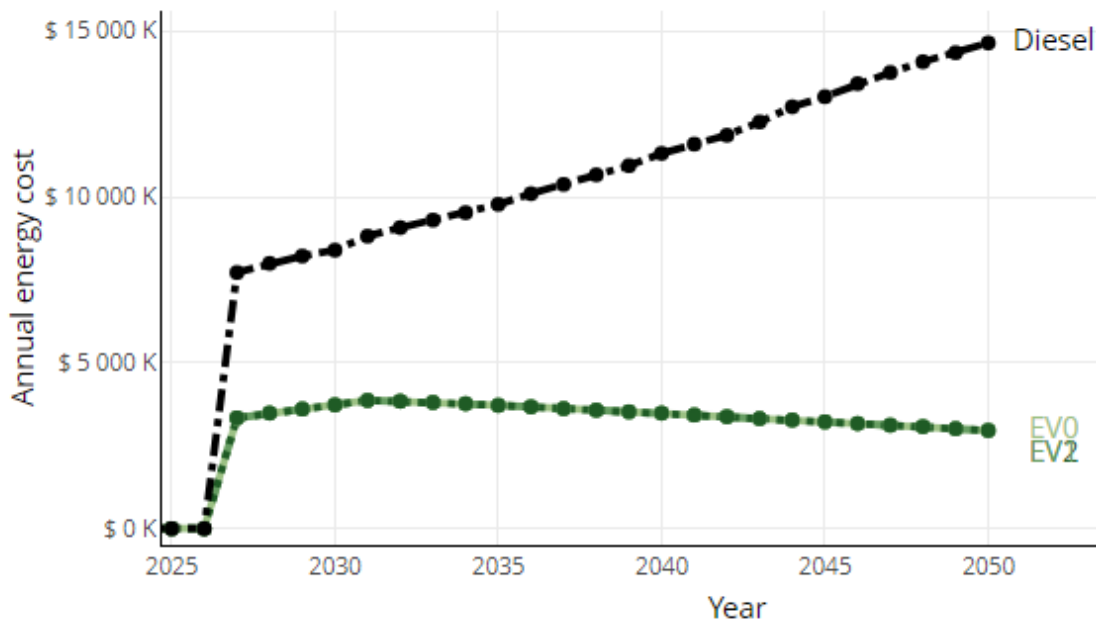


FIGURE 5 WAREHOUSE 2 ENERGY COST PER DISTANCED TRAVELED

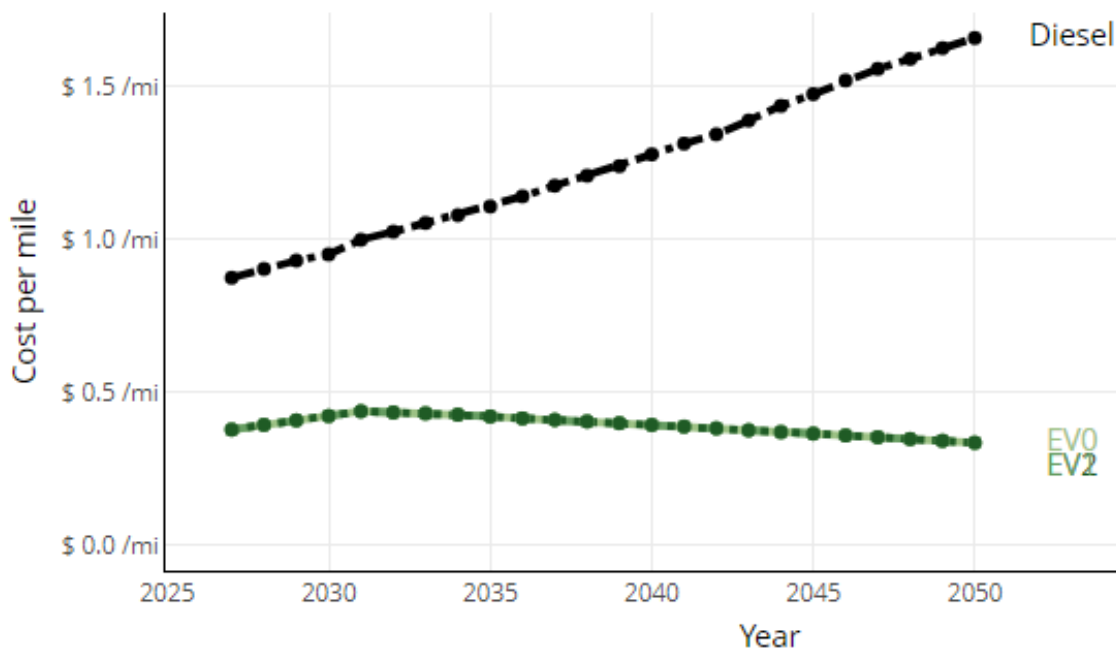

EVSE FINANCING

Federal Incentives

Commercial Clean Vehicle Tax Credit

The Federal Government's adoption of the Infrastructure Reduction Act (IRA) enacted new Federal tax credits ([IRC Section 45W](#)) for commercial clean (electric or hydrogen fuel cell) vehicles in 2022. Eligible entities include businesses and tax-exempt organizations that purchase commercial clean vehicles between January 1, 2023, and before January 1, 2033. Heavy-duty vehicles with a gross vehicle weight rating (GVWR) of 14,000 lbs. or greater are eligible for a tax credit up to \$40,000, or 30 percent of the incremental cost of the vehicle as compared to a gasoline or diesel vehicle, whichever is lower. Applicable electric vehicles must have a battery with at least 15 kWh of capacity and be made by a qualified manufacturer (see the [IRS's list](#) for examples). For tax exempt entities, such as schools, governments, or non-profit organizations, the tax credit is available through a mechanism commonly known as [direct, or elective, pay](#).

Alternative Fuel Infrastructure Tax Credit

Beginning on January 1, 2023, installation of EV charging equipment is eligible for a tax credit of 30 percent of the installation costs (or 6 percent in the case of property subject to depreciation), not to exceed \$100,000. Permitting and inspection fees are not included in covered expenses. As above, tax-exempt entities are eligible to claim these credits through direct or elective pay.

These tax credits are only available to business locations and tax-exempt entities with the following census tract requirements:

- » A population census tract where the poverty rate is at least 20 percent.
- » Metropolitan and non-metropolitan area census tract where the median family income is less than 80 percent of the State median family income level.

Fleets should work with their charging infrastructure installers to determine eligibility by identifying their census tract using [this tool](#) and determining if it is included in the [IRS's list](#). If eligible, [tax form 8911](#) should be completed.

State Incentives

Efficiency Maine Medium- and Heavy-Duty Vehicle Incentive Pilot

In October 2024, the quasi-state agency Efficiency Maine Trust launched a pilot program to demonstrate potential use cases and performance of zero-emission MHDVs in Maine. Awards will be issued in three rounds, with applications open through the end of February 2025, with the possibility of further rounds of funding in the future. In order to be eligible, applicants must be based in Maine and already own a Class 3 to 7 vehicle in their fleet. The maximum award for different vehicle classes is shown in Table 3.

TABLE 3 EFFICIENCY MAINE INCENTIVE LEVELS

Vehicle Class	Maximum Award
Class 3	40% of purchase price up to \$40,000
Class 4	40% of purchase price up to \$60,000
Class 5	50% of purchase price up to \$80,000
Class 6	50% of purchase price up to \$100,000
Class 7	50% of purchase price up to \$120,000

Along with awards for vehicle purchases, the program also offers incentives for Level 2 charging and professional services such as consulting. For further information, and to apply, fleets should visit [the program website](#).

RESULTS

Total Cost of Ownership

Calculating the total cost of ownership (TCO) for a vehicle offers fleet owners information to evaluate direct and indirect costs of EV purchases, as well as potential savings over the life cycle of purchased vehicles. The transition to EVs involves a shift in perspective regarding TCO components. Traditional internal combustion engine (ICE) vehicle costs are usually presented as capital cost for vehicles and dollar per gallon (\$/gal) costs for fuel, as well as lifetime maintenance expenses. An analysis of TCO for EVs must consider power output, \$ per kilowatt, grants and incentive programs, and planning and installing EVSE. While EVs are typically more expensive upfront, they are often less expensive to operate and maintain than

comparable ICE vehicles; in many cases, these operational savings can offset higher upfront costs across the lifespan of the vehicle, resulting in a positive TCO.

TCO is calculated by combining the vehicle capital and operating costs over a set period of operations. For this analysis, the vehicle price points came from industry averages. Calculations assume a purchase in 2025 and a 12-year vehicle life, which is average across Maine trucks in this class. The results represent one vehicle in each duty cycle. Calculations accounted for the Efficiency Maine Trust vehicle incentives and the Federal Commercial Clean Vehicle tax credit. The results are estimates and actual cost differences may vary.

Each TCO scenario is modeled with a capital procurement cost for the diesel versus electric model and does not include any vehicle resale or residual values. The Federal tax credit is detailed in the [Federal Incentives](#) section and, along with Maine State incentives, is taken into consideration when modeling cumulative costs over time. For simplicity, the TCO calculation includes procurement of EVSE and infrastructure upgrades based on the cost of a single port. Infrastructure upgrade costs are calculated per location, not per vehicle. Those costs are modeled in the [Fueling/Charging Cost Analysis](#) section. The included costs are vehicle procurement, sales tax, Federal excise tax, maintenance, fuel, and insurance costs.

Volvo Day Cab

The Volvo day cabs at Fleet 4's warehouse have an average annual mileage of 96,000 miles and operate 365 days per year, meaning their daily driving distance is about 263 miles. Figure 6 shows cumulative costs over time and Figure 7 shows itemized total costs.

FIGURE 6 DAY CAB—FLEET COSTS OVER TIME


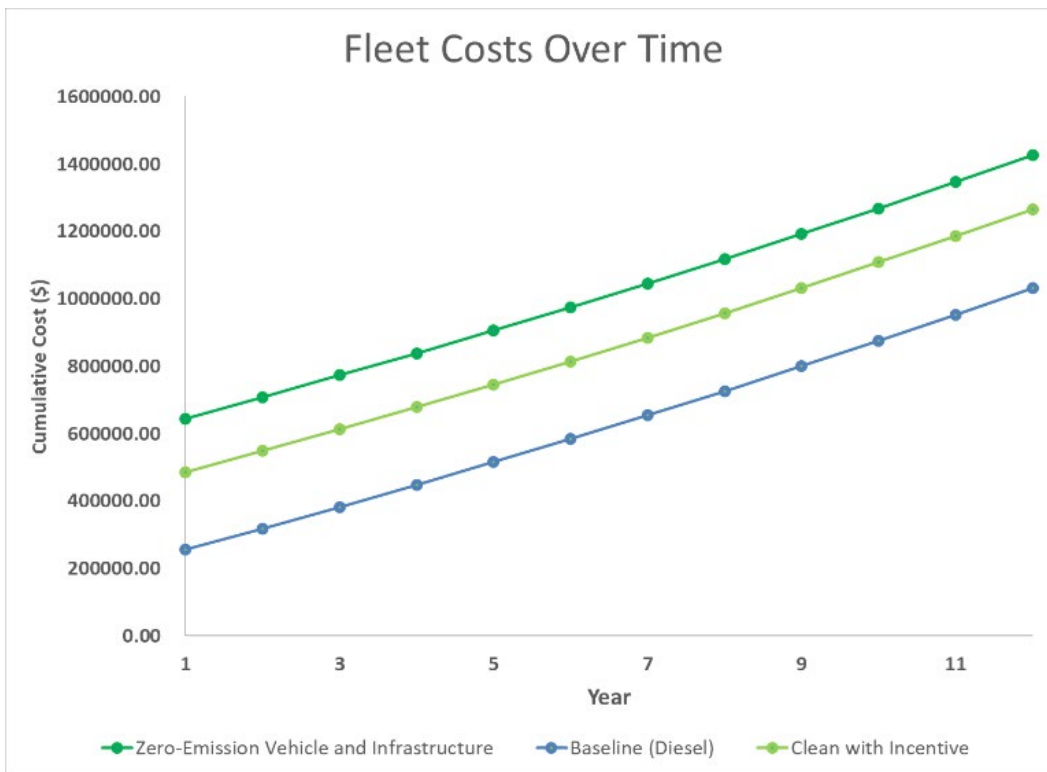


FIGURE 7 DAY CAB—ITEMIZED FLEET COSTS

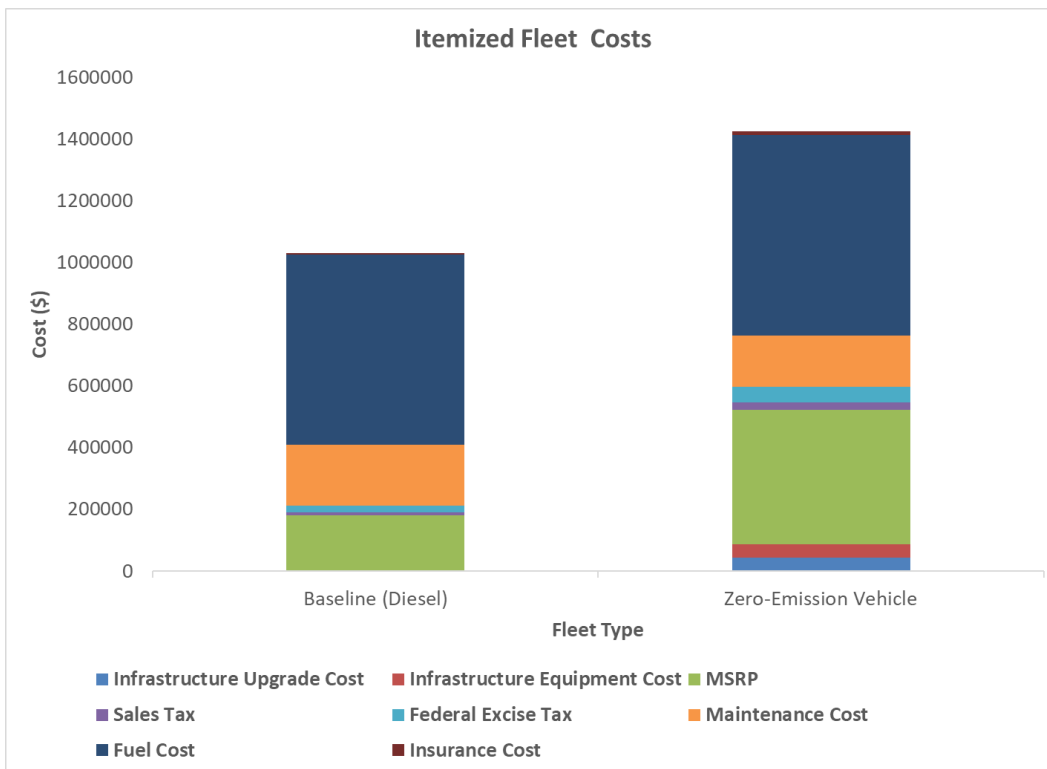

This TCO analysis compares a Class 8 diesel-powered tractor trailer priced at \$170,300 with an electric tractor trailer priced at \$435,000. It assumes a \$4.00/gallon price of diesel and an \$0.18/kWh price of charging. The infrastructure cost is priced at \$87,050 for the costs of one Level 3 DC fast charging port hardware, installation and local infrastructure, and utility side make-ready costs. This cost is included in the upfront capital costs of the vehicle purchase.

The modeled incentive is \$120,000 off the vehicle purchase price, reducing the capital procurement cost to \$315,000. The Commercial Clean Vehicle Tax Credit removes \$40,000 more (30 percent of the MSRP, capped at \$40,000), reducing the procurement cost further to \$275,000.

The results indicate that the electric trailer's payback period exceeds its expected life due to significantly higher upfront capital costs. The electric trailer still produces an estimated 18 percent reduction in annual maintenance costs (\$2,984) due to savings on items like oil and filter changes, and reduction in parts failure (fewer moving parts). Itemized costs are shown in Table 4.

TABLE 4 VOLVO DAY CAB ITEMIZED CUMULATIVE COSTS OVER 12 YEAR VEHICLE LIFE

Cost Components	Baseline	ZEV
Manufacturer's Suggested Retail Price	\$180,000	\$435,000
Sales Tax	\$9,900	\$23,925
Federal Excise Tax	\$21,600	\$52,200
Maintenance Cost	\$196,948	\$164,124
Fuel Cost	\$618,177	\$652,019
Insurance Cost	\$4,698	\$11,353
Infrastructure Costs	\$0	\$87,450

Mack Sleeper

The Mack sleeper cabs at Fleet 4's warehouse have an average annual mileage of 99,011 miles and operate 365 days per year, meaning their daily driving distance is about 271 miles. Figure 8 shows cumulative costs over time and Figure 9 shows itemized total costs.

FIGURE 8 MACK SLEEPER—FLEET COSTS OVER TIME


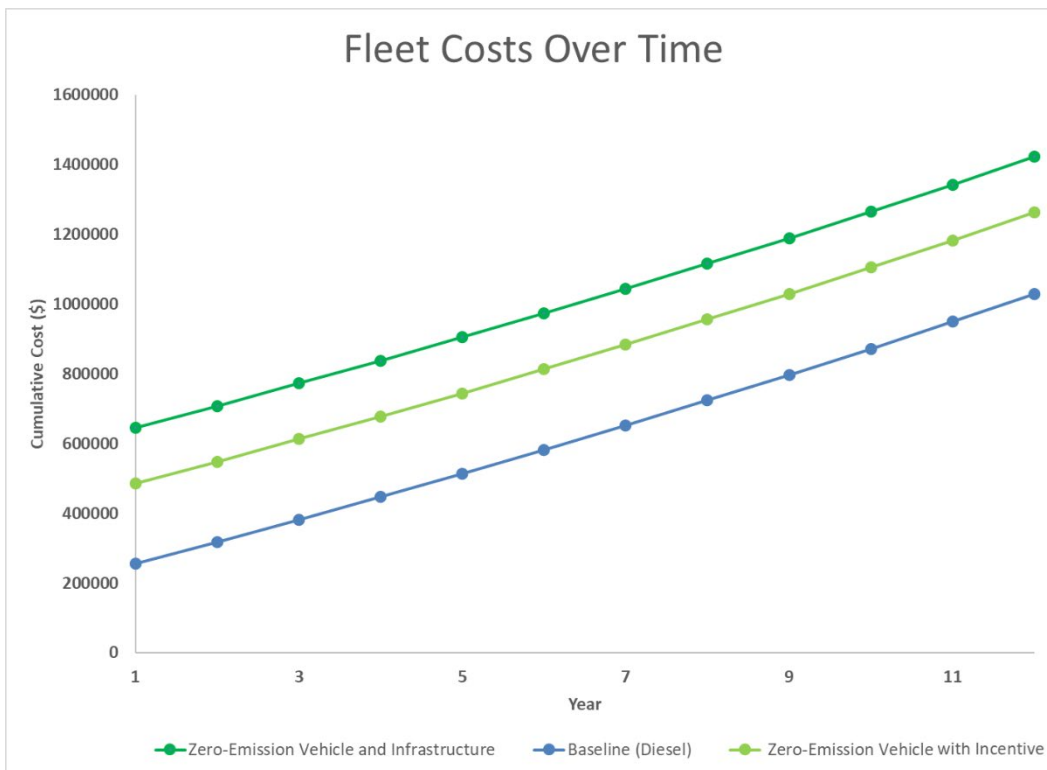


FIGURE 9 MACK SLEEPER—ITEMIZED FLEET COSTS

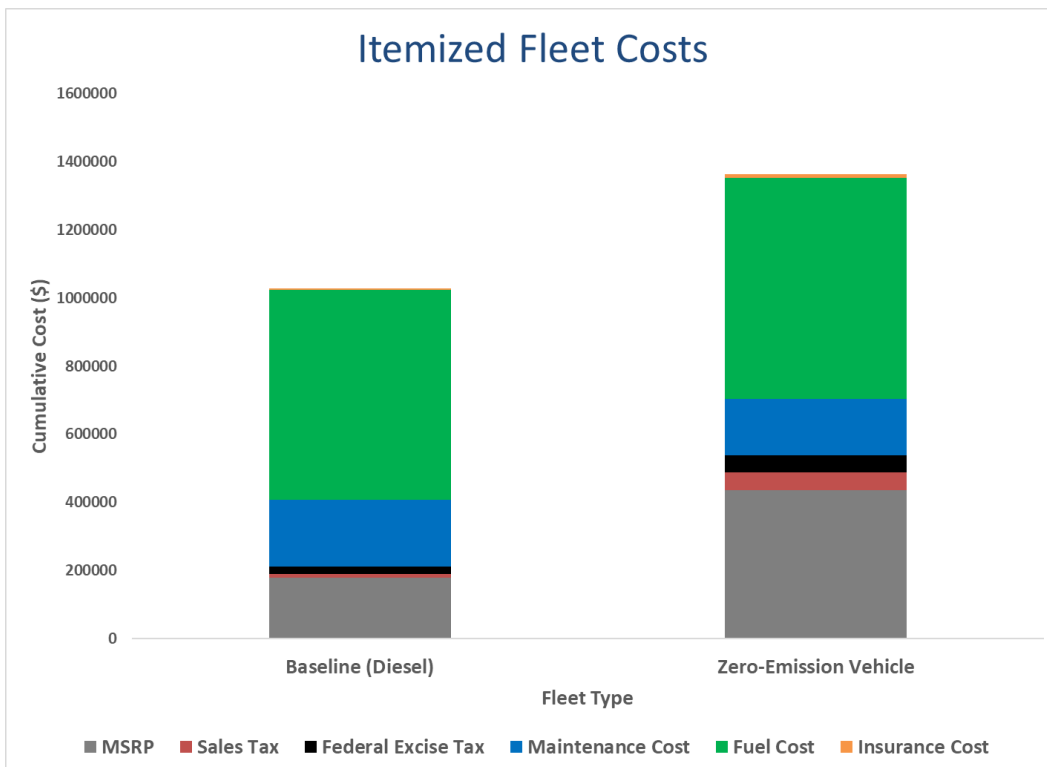

This TCO analysis compares a Class 8 diesel-powered tractor trailer priced at \$170,300 with an electric tractor trailer priced at \$435,000. It assumes a \$4.00/gallon price of diesel and an \$0.18/kWh price of charging. The infrastructure cost is priced at \$87,050 for the costs of one Level 3 DC fast charging port hardware, installation and local infrastructure, and utility side make-ready costs. This cost is included in the upfront capital costs of the vehicle purchase.

The modeled incentive is \$120,000 off the purchase vehicle price, reducing the capital procurement cost to \$315,000. The Commercial Clean Vehicle Tax Credit removes \$40,000 more (30 percent of the MSRP capped at \$40,000), reducing the procurement cost further to \$275,000.

The results indicate that the electric trailer's payback period exceeds its expected life due to significantly higher upfront capital costs. The electric trailer still produces an estimated 18 percent reduction in annual maintenance costs (\$2,984) due to savings on items like oil and filter changes, and reduction in parts failure (fewer moving parts). Itemized costs are shown in Table 5.

TABLE 5 MACK SLEEPER ITEMIZED CUMULATIVE COSTS OVER 12 YEAR VEHICLE LIFE

Cost Components	Baseline	ZEV
MSRP	\$180,000	\$435,000
Sales Tax	\$9,900	\$23,925
Federal Excise Tax	\$21,600	\$52,200
Maintenance Cost	\$196,041	\$163,368
Fuel Cost	\$615,331	\$649,017
Insurance Cost	\$4,698	\$11,353
Infrastructure Costs	\$0	\$87,450

Peterbilt Day Cab

The Peterbilt day cabs at Fleet 4's warehouse have an average annual mileage of 67,315 miles and operate 365 days per year, meaning their daily driving distance is about 185 miles. Figure 8 shows cumulative costs over time and Figure 9 shows itemized total costs.

FIGURE 10 PETERBILT DAY CAB—FLEET COSTS OVER TIME


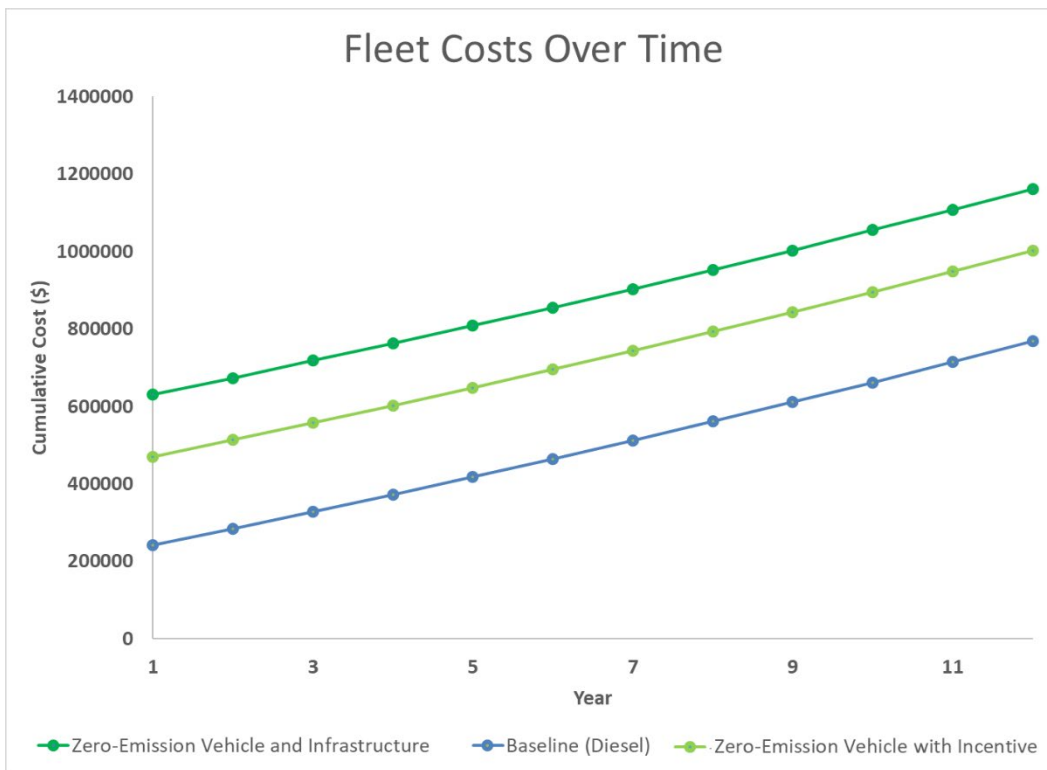


FIGURE 11 PETERBILT DAY CAB—ITEMIZED FLEET COSTS

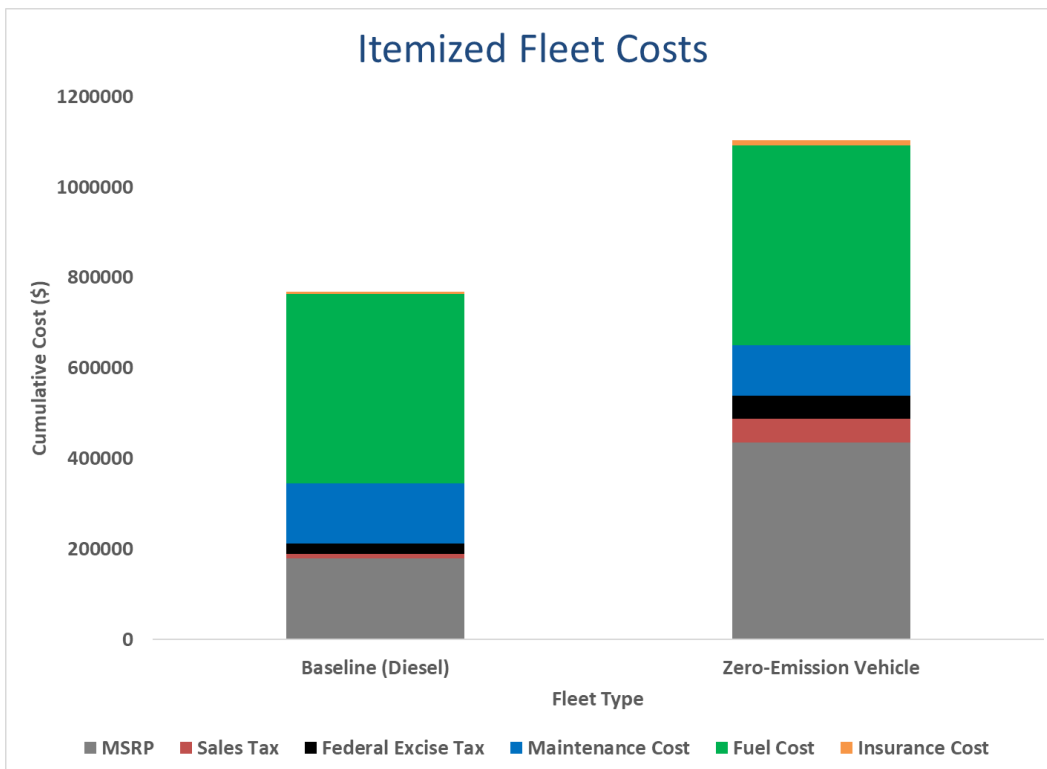

This TCO analysis compares a Class 8 diesel-powered tractor trailer priced at \$170,300 with an electric tractor trailer priced at \$435,000. It assumes a \$4.00/gallon price of diesel and an \$0.18/kWh price of charging. The infrastructure cost is priced at \$87,050 for the costs of one Level 3 DC fast charging port hardware, installation and local infrastructure, and utility side make-ready costs. This cost is included in the upfront capital costs of the vehicle purchase.

The modeled incentive is \$120,000 off the purchase vehicle price, reducing the capital procurement cost to \$315,000. The Commercial Clean Vehicle Tax Credit removes \$40,000 more (30 percent of the MSRP capped at \$40,000), reducing the procurement cost further to \$275,000.

The results indicate that the electric trailer's payback period exceeds its expected life due to significantly higher upfront capital costs. The electric trailer still produces an estimated 18 percent reduction in annual maintenance costs (\$2,019) due to savings on items like oil and filter changes, and reduction in parts failure (fewer moving parts). Itemized costs are shown in Table 5.

TABLE 6 PETERBILT DAY CAB ITEMIZED CUMULATIVE COSTS OVER 12 YEAR VEHICLE LIFE

Cost Components	Baseline	ZEV
MSRP	\$180,000	\$435,000
Sales Tax	\$9,900	\$23,925
Federal Excise Tax	\$21,600	\$52,200
Maintenance Cost	\$133,284	\$111,070
Fuel Cost	\$418,347	\$441,250
Insurance Cost	\$4,698	\$11,353
Infrastructure Costs	\$0	\$87,450

Yard Tractor

The yard tractors at Fleet 4's warehouse have an average annual mileage of 99,011 miles and operate 365 days per year, meaning their daily driving distance is about 271 miles. Figure 8 shows cumulative costs over time and Figure 9 shows itemized total costs.

FIGURE 12 YARD TRACTOR—FLEET COSTS OVER TIME


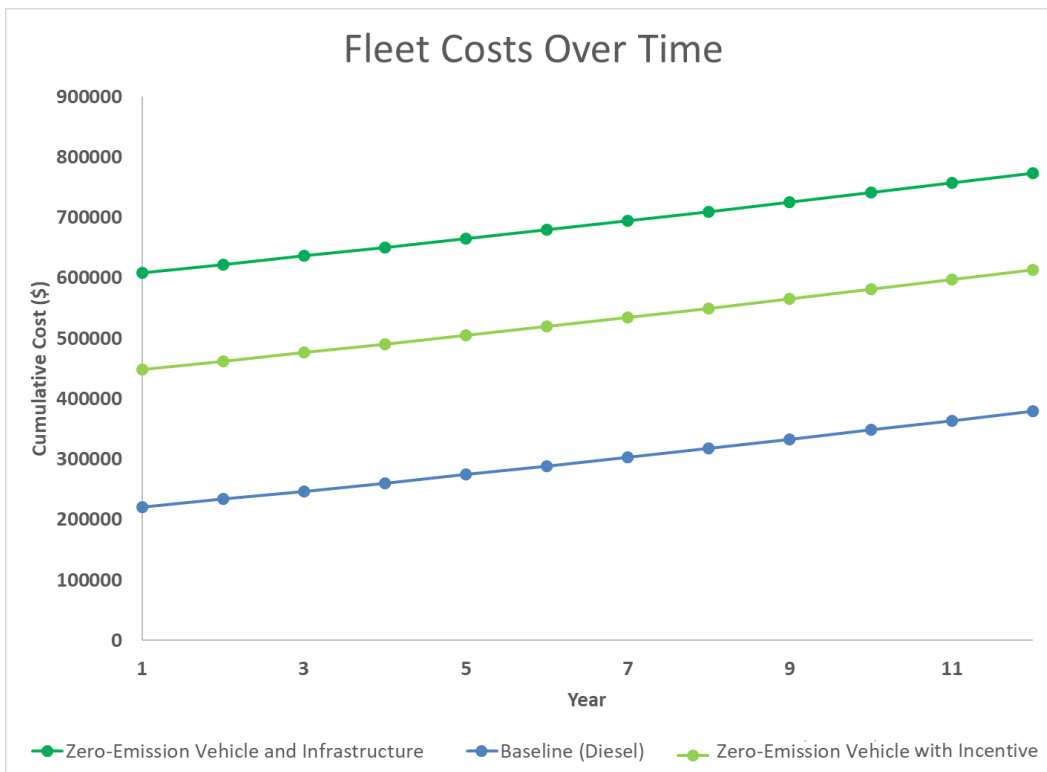


FIGURE 13 YARD TRACTOR—ITEMIZED FLEET COSTS

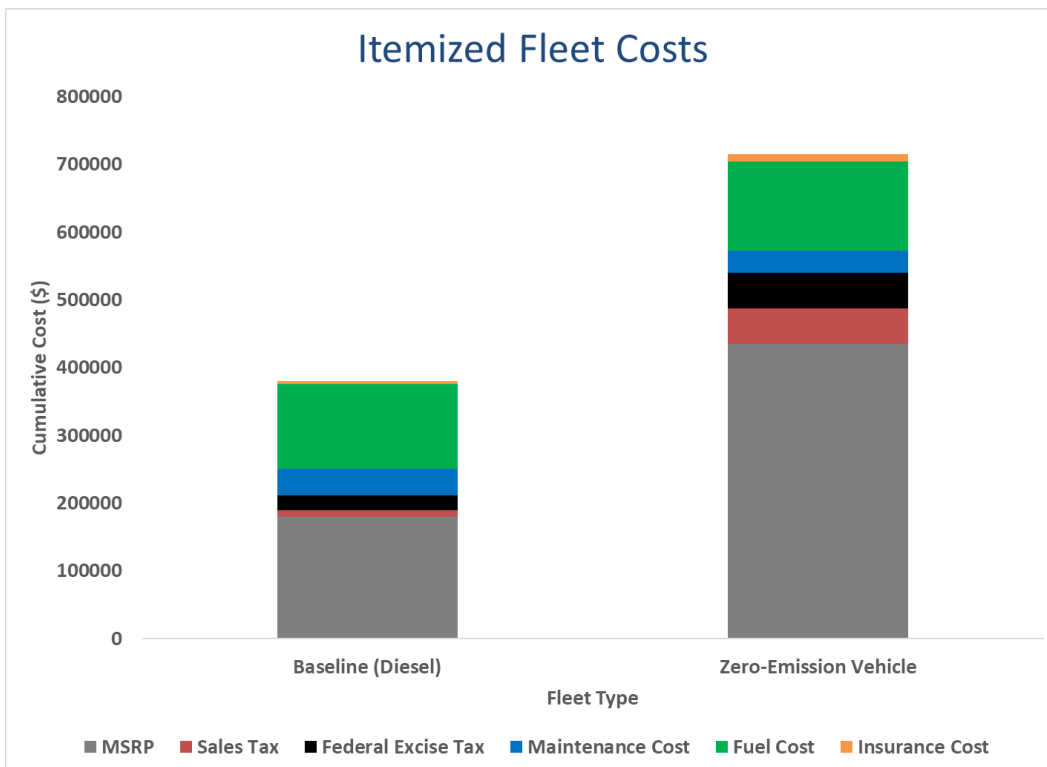

This TCO analysis compares a Class 8 diesel-powered tractor trailer priced at \$170,300 with an electric tractor trailer priced at \$435,000. It assumes a \$4.00/gallon price of diesel and an \$0.18/kWh price of charging. The infrastructure cost is priced at \$87,050 for the costs of one Level 3 DC fast charging port hardware, installation and local infrastructure, and utility side make-ready costs. This cost is included in the upfront capital costs of the vehicle purchase.

The modeled incentive is \$120,000 off the purchase vehicle price, reducing the capital procurement cost to \$315,000. The Commercial Clean Vehicle Tax Credit removes \$40,000 more (30 percent of the MSRP capped at \$40,000), reducing the procurement cost further to \$275,000.

The results indicate that the electric trailer's payback period exceeds its expected life due to significantly higher upfront capital costs. The electric trailer still produces an estimated 18 percent reduction in annual maintenance costs (\$600) due to savings on items like oil and filter changes, and reduction in parts failure (fewer moving parts). Itemized costs are shown in Table 5.

TABLE 7 YARD TRACTOR ITEMIZED CUMULATIVE COSTS OVER 12 YEAR VEHICLE LIFE

Cost Components	Baseline	ZEV
MSRP	\$180,000	\$435,000
Sales Tax	\$9,900	\$23,925
Federal Excise Tax	\$21,600	\$52,200
Maintenance Cost	\$196,041	\$163,368
Fuel Cost	\$615,331	\$649,017
Insurance Cost	\$4,698	\$11,353
Infrastructure Costs	\$0	\$87,450

Fleet Emissions

Maine's transportation sector is the largest source of greenhouse emissions in the State, and medium- and heavy-duty trucks account for 27 percent of these emissions.¹ Providing power to vehicles via electricity is significantly less polluting than diesel fuel, especially in areas served by low-carbon sources of electricity generation. Renewable resources powered

¹ Rocky Mountain Institute. "[RMI Analysis: With Smart Policy, Truck Electrification Is Within Reach.](#)" Accessed October 2024.

64 percent of Maine's total electricity net generation, and wind provided the largest share at 23 percent of the State's total net generation, in 2022.²

An analysis of Fleet 4's direct exhaust emissions was performed using the U.S. Environmental Protection Agency's Diesel Emission Quantifier tool. The analysis combines the average annual mileage traveled by all 97 vehicles in the fleet. Converting Fleet 4's vehicles to ZEVs would eliminate all of these direct emissions.

TABLE 8 INTERNAL COMBUSTION ENGINE FLEET EMISSIONS

Pollutant	Annual Emissions (Short Tons/Year)
Carbon Monoxide (CO)	13.06
Nitrogen Oxides (NO _x)	19.285
Particulate Matter (PM)	0.034
Carbon Dioxide (CO ₂)	5,909

IMPLEMENTATION CONSIDERATIONS

Energy Storage and Resiliency

Power outages are always a possibility at fleet depots, regardless of grid advancements and fidelity. Fleets should consider contingencies for maintaining operations of electric trucks in the event of a long-term power outage. Today's electric vehicles do not necessarily require electricity from the grid to be available to properly fuel. There are means of fueling battery-electric vehicles using energy storage solutions, most commonly batteries, which are safer than storing flammable fossil fuels on site. Critical vehicle operations may consider other forms of backup power to ensure charging access, including generators.

Many consumers have asked whether EVs can be used in an emergency to provide backup power to homes, offices, and other facilities. For a vehicle to provide backup power, there are several additional considerations: whether the vehicle is designed for 'bidirectional charging', meaning that the vehicle can output power, and whether the facility has appropriate two-way charging equipment. The Ford F-150 Lightning is equipped to support

² U.S. Energy Information Administration. [State Profile and Energy Estimates](#). Accessed October 2024.

bidirectional charging, and Ford supports claims that the truck can provide up to 100 kWh of power on a single charge, which is enough to power an average house for three days (30 kWh per day).

Preheat/Precool

One consideration often overlooked in commercial EV operation is the energy use associated with climate control, either for the operator or for the goods themselves. Idle time spent bringing a cab to a comfortable riding temperature uses energy otherwise intended for moving the vehicle along its intended route. The energy used to heat or cool the vehicle cabin may consume a significant amount of the vehicle's battery capacity. Preconditioning while vehicles are connected to chargers at the depot is a simple approach to providing comfortable conditions and extending driving range during winter and summer. These types of considerations are important to factor in, and experiment with, during a fleet's initial deployment.

“Vampire” Energy

Vehicles of all kinds are meant to be driven; they benefit from regular usage by foregoing the potential negative impacts of remaining idle for extended periods. One such impact to commercial EVs is what is known as “vampire” energy, where a vehicle's battery will slowly deplete while it remains unplugged and idle. This is normal behavior and not an indication that anything is malfunctioning. Rather, this is an expected effect resulting from a combination of onboard electronics that remain on or in stand-by, as well as the natural chemical reactions occurring in a vehicle's battery.

Best practices for long-term battery health include keeping a vehicle's battery charged to 80 percent when possible and taking measures to ensure its state of charge does not regularly fall below 20 percent while idle. Managed and networked charging infrastructure can help fleets keep battery state of charge within this optimal range. For smaller EV deployments and fleets involving just a few vehicles, this also may be achievable through effective training and communication with staff on-site.

REFERENCES

CALSTART's Zero-Emission Technology Inventory ([ZETI](#)) is a public online interactive dashboard containing the status and anticipated timing of commercial availability for zero-emission MHDVs across a range of vehicle platforms and key global regions. ZETI was the primary tool used to find equivalent medium and heavy-duty electric vehicle models that could replace the current fleet inventory.