




POND 1 OUTLET STRUCTURE
NO SCALE

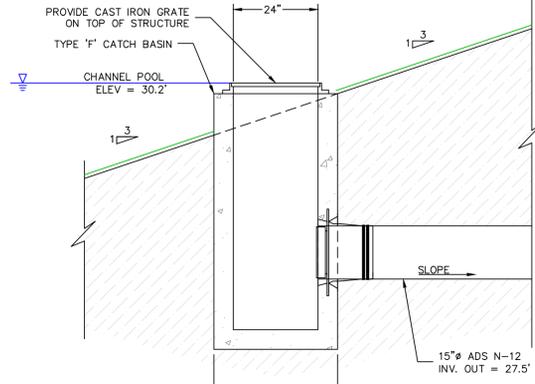

POND 2 OUTLET STRUCTURE
NO SCALE

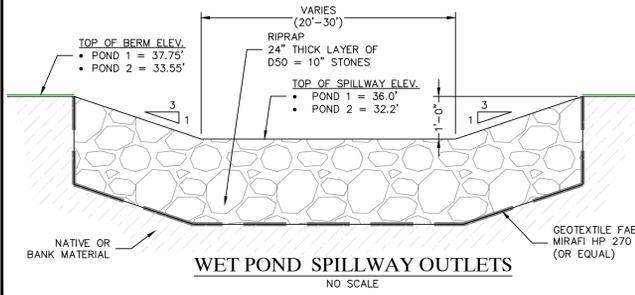

WET POND SPILLWAY OUTLETS
NO SCALE

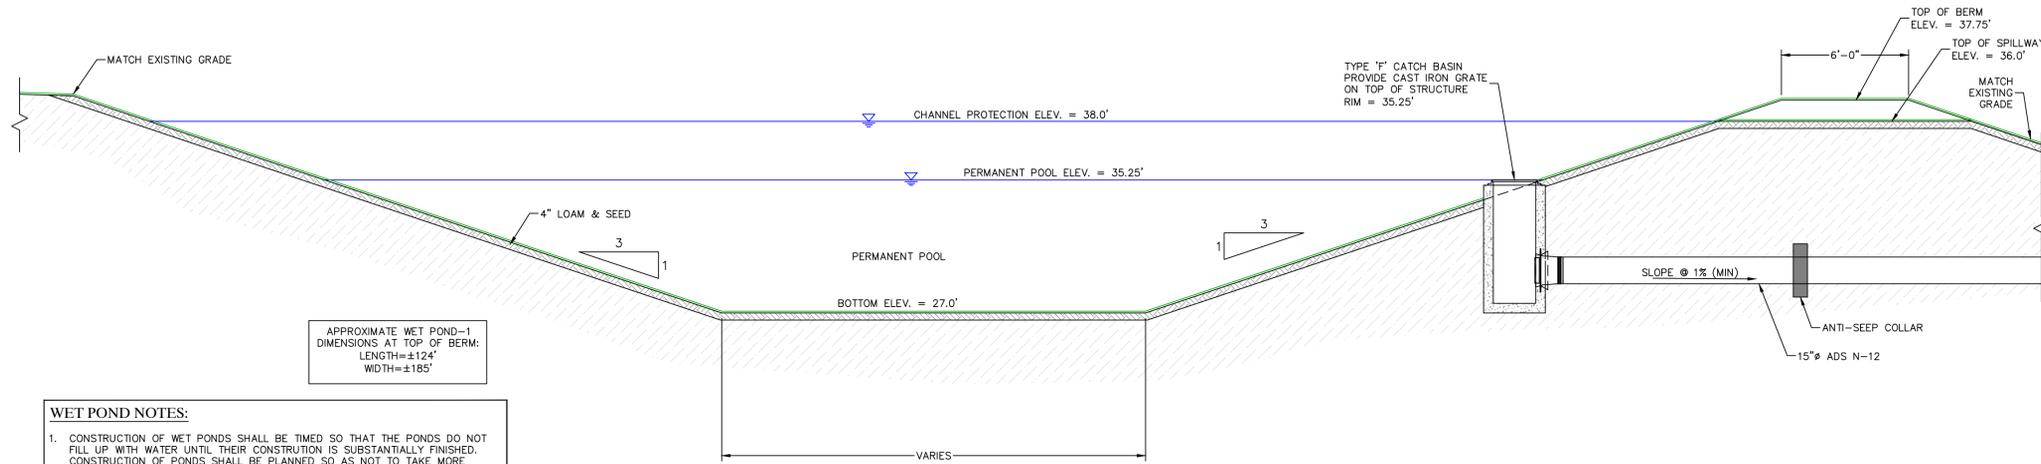


APPROXIMATE WET POND-1
DIMENSIONS AT TOP OF BERM:
LENGTH=±124'
WIDTH=±185'

**WET POND -1
SCHEMATIC SECTION**
NO SCALE

WET POND NOTES:

1. CONSTRUCTION OF WET PONDS SHALL BE TIMED SO THAT THE PONDS DO NOT FILL UP WITH WATER UNTIL THEIR CONSTRUCTION IS SUBSTANTIALLY FINISHED. CONSTRUCTION OF PONDS SHALL BE PLANNED SO AS NOT TO TAKE MORE THAN 1 TO 2 WEEKS, EXCLUDING MAJOR WEATHER DELAYS. CONSTRUCTION SHALL BE STARTED NO LATER THAN SEPTEMBER 1 OR EARLIER THAN JUNE 1. IF SIDE SLOPES AND BANKS CANNOT BE REVEGETATED AND STABILIZED BY THE END OF THE GROWING SEASON, POND CONSTRUCTION SHOULD BE CHANGED TO THE FOLLOWING YEAR. SEEDING OR STABILIZATION MUST OCCUR BY SEPTEMBER 15 IN PREPARATION FOR THE WINTER SEASON.
2. ALL FILL SECTION EMBANKMENT MATERIALS SHALL BE COMPACTED CLAY SILT AND HAVE AT LEAST 20% FINES (MORE THAN 20% BY WEIGHT PASSING THE #200 SIEVE), AND SHALL BE COMPACTED TO A MINIMUM OF 95% MODIFIED PROCTOR IN 9-12" LIFTS MAX. THE CONTRACTOR MAY USE GLACIAL MARINE SOIL IF AVAILABLE FROM ON-SITE SOURCES WITH THE APPROVAL OF THE OWNER'S ENGINEER.
3. PERMANENT POOL SHALL HAVE AN IMPERMEABLE LINER.
4. SPILLWAY SHALL BE CONSTRUCTED ON NATURAL GRADES.

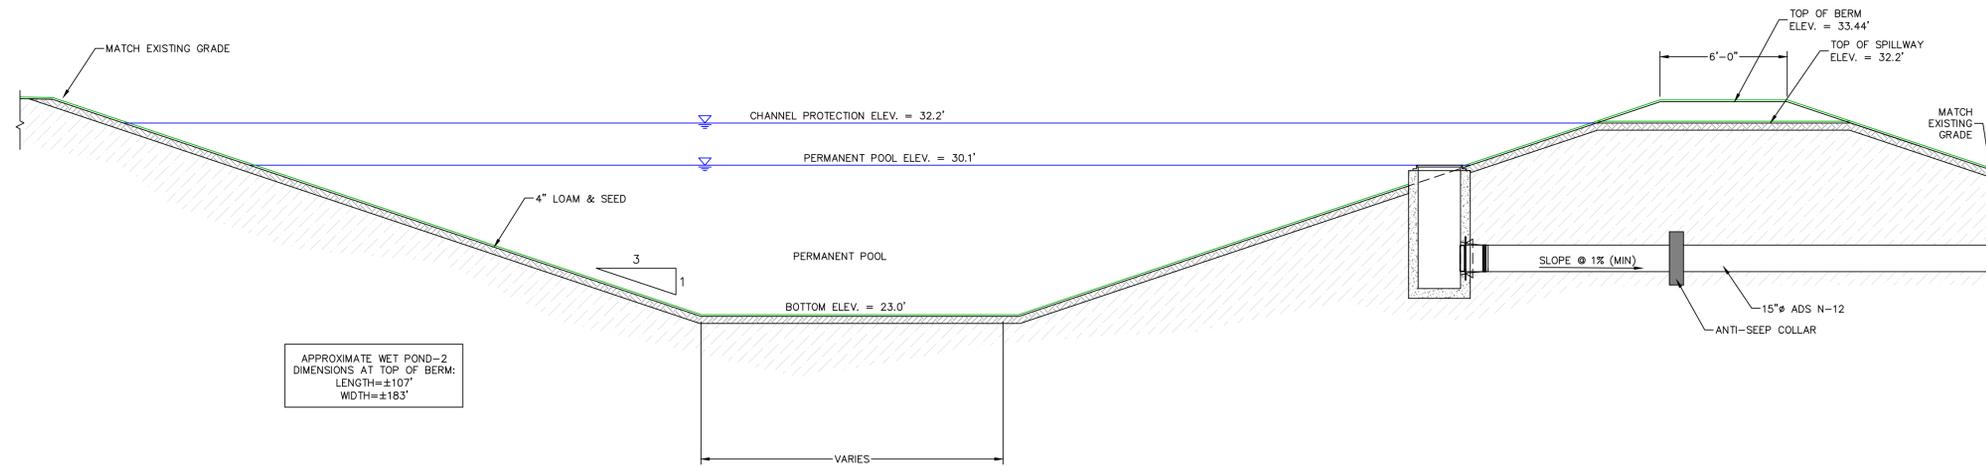

APPROXIMATE WET POND-2
DIMENSIONS AT TOP OF BERM:
LENGTH=±107'
WIDTH=±183'

**WET POND -2
SCHEMATIC SECTION**
NO SCALE

NO.	REVISIONS	DATE

SHEET TITLE:	CIVIL DETAILS
	SCALE: AS NOTED
DRAWN BY:	LP
CHECKED BY:	HTL
DATE:	MARCH 25, 2021

CLIENT/PROJECT:	KINGFISH MAINE
LOCATION:	DUN GARVIN ROAD
TOWN:	JONESPORT
STATE:	WASHINGTON STATE/MAINE

Gartley & Dorsky
ENGINEERING SURVEYING
59 Union Street, Unit 1, P.O. Box 1031 Camden, ME 04843-1031
Ph: (207) 236-4365 Fax: (207) 236-3055 Toll Free: 1-888-282-4365
165 Main Street, Suite 210 P.O. Box 1072 Dunsmuir, Maine 04543
Ph: (207) 790-5005

