

PHASE 2B WORK AREA  
195,500SF +/-

CONSTRUCTION LAYDOWN AREA TO BE RE-CONFIGURED AND MINIMIZED AS FINAL BUILDING ELEMENTS ARE COMPLETED

REMOVE GRAVEL LAYDOWN AREA AND FINAL GRADE AND LANDSCAPE AREA

REMOVE STABILIZED CONSTRUCTION ACCESS AND PERIMETER EROSION CONTROLS ONCE SITE IS FULLY STABILIZED.

INSTALL PERMANENT RIPRAP SLOPE PROTECTION ON GRADED SLOPE


INSTALL EXCAVATION EDGE DRAINS AND OUTLET TO PLUNGE POOL  
INV. OUT = 43.0FT

OVER-EXCAVATE UNSUITABLE SOILS AND PLACE GEOTEXTILE, DRAINAGE LAYER AND GRANULAR BORROW - NOTE CONSTRUCTION TO PROCEED FROM WEST TO EAST WITH A MAXIMUM AREA OF 80,000SF OF UNCOVERED GRUBBED AREA AT ANY GIVEN TIME

AT END OF MAJOR EARTHWORK, AND ONCE THE SITE IS STABILIZED, REMOVE TEMP. SEDIMENT BASIN 4 AND INSTALL PERMANENT STORMWATER SYSTEM

REV	DESCRIPTION	DATE
0	NRPA-PRINT FOR NAF REVIEW	4-29-19

NRPA-PRINT FOR NAF REVIEW  
4-29-19  
CURRENT ISSUE STATUS:



TRUE NORTH:  
SMRT Architects and Engineers  
144 Fore Street  
Portland, Maine 04104  
1.877.700.7678  
www.smrtinc.com




RANSOM Consulting Engineers and Scientists  
400 Commercial Street, Suite 400  
Portland, Maine 04101

NORDIC AQUAFARMS  
285 NORTHPORT AVENUE

BELFAST, MAINE

SOIL EROSION & SEDIMENT CONTROL PHASING PLAN -9  
PHASE 2B  
SHEET TITLE:

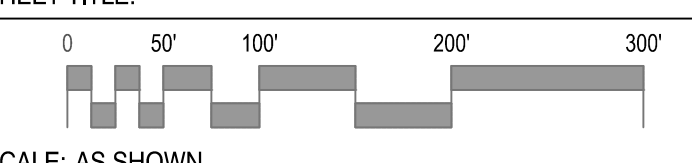

SCALE: AS SHOWN

PROJECT MANAGER: ADB PROJECT NO: 18076

A/E OF RECORD:

JOB CAPTAIN: SP

DRAWN BY: AJ

SMRT FILE: CE118-18076 SHEET No.

**CE118**

NOT FOR CONSTRUCTION